

FIG. 1

000000-0000-0000-0000-0000-0000

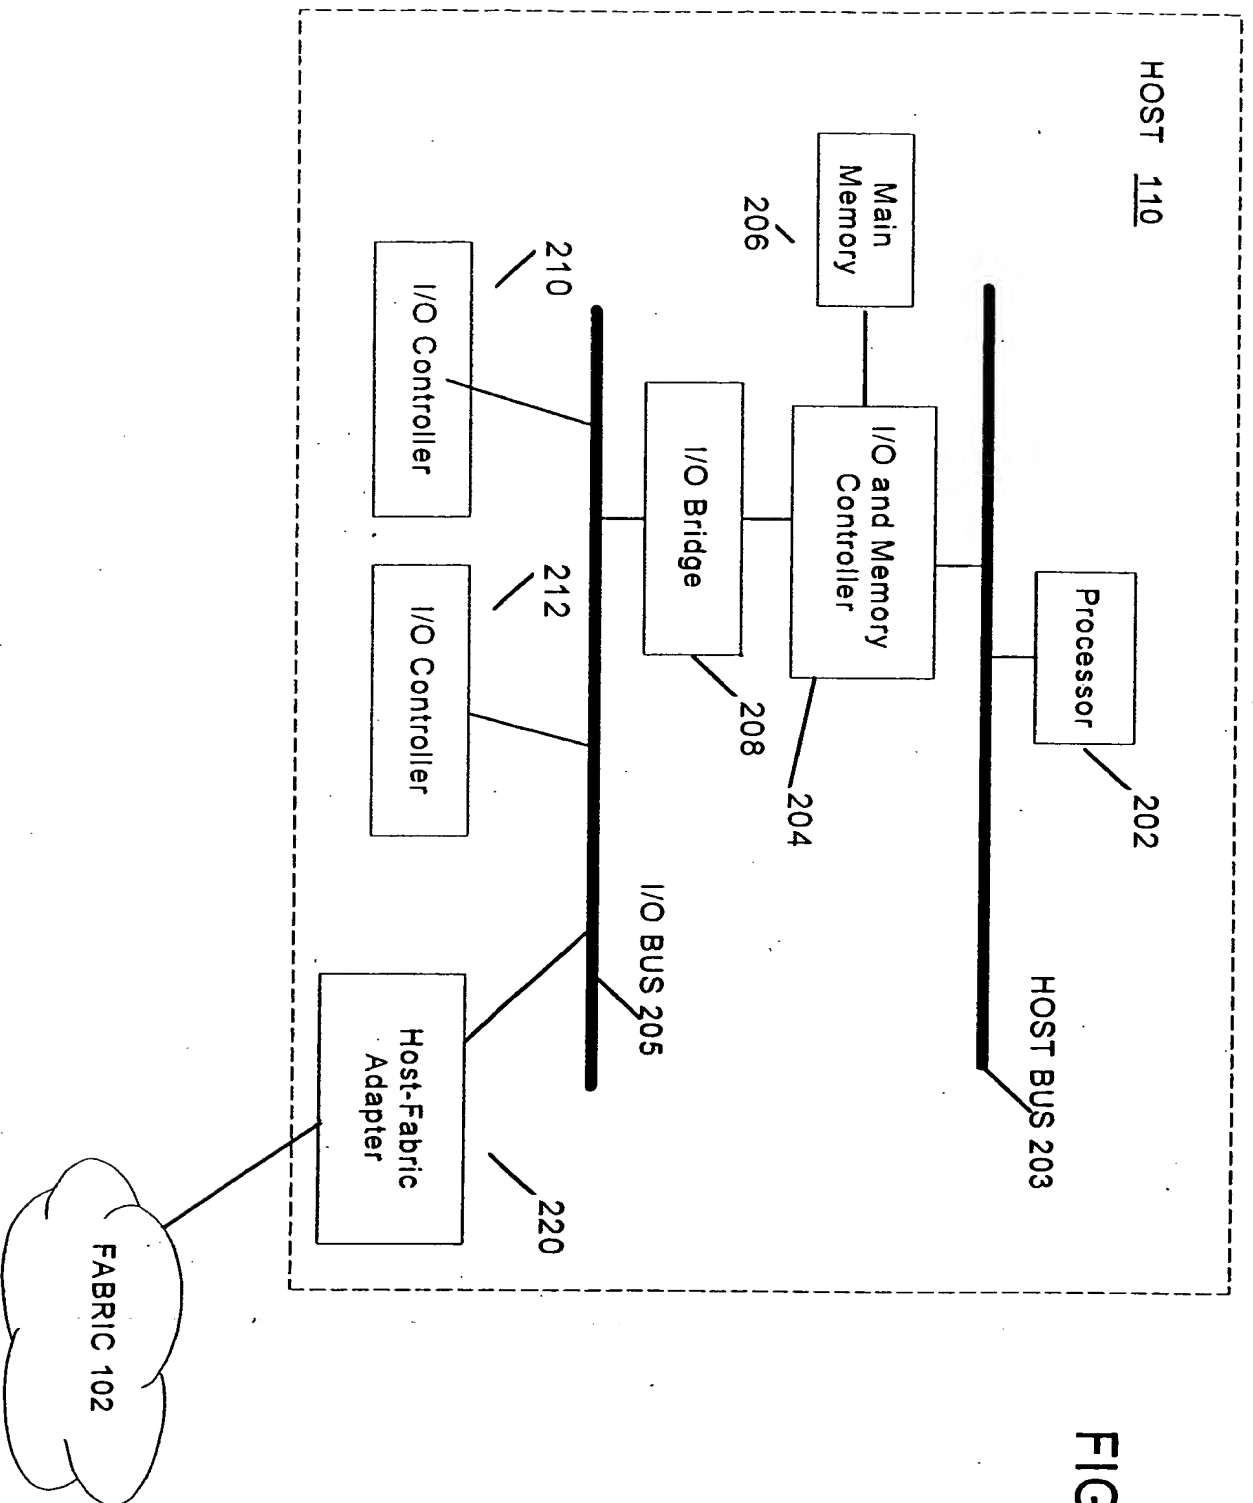


FIG. 2

HOST 110


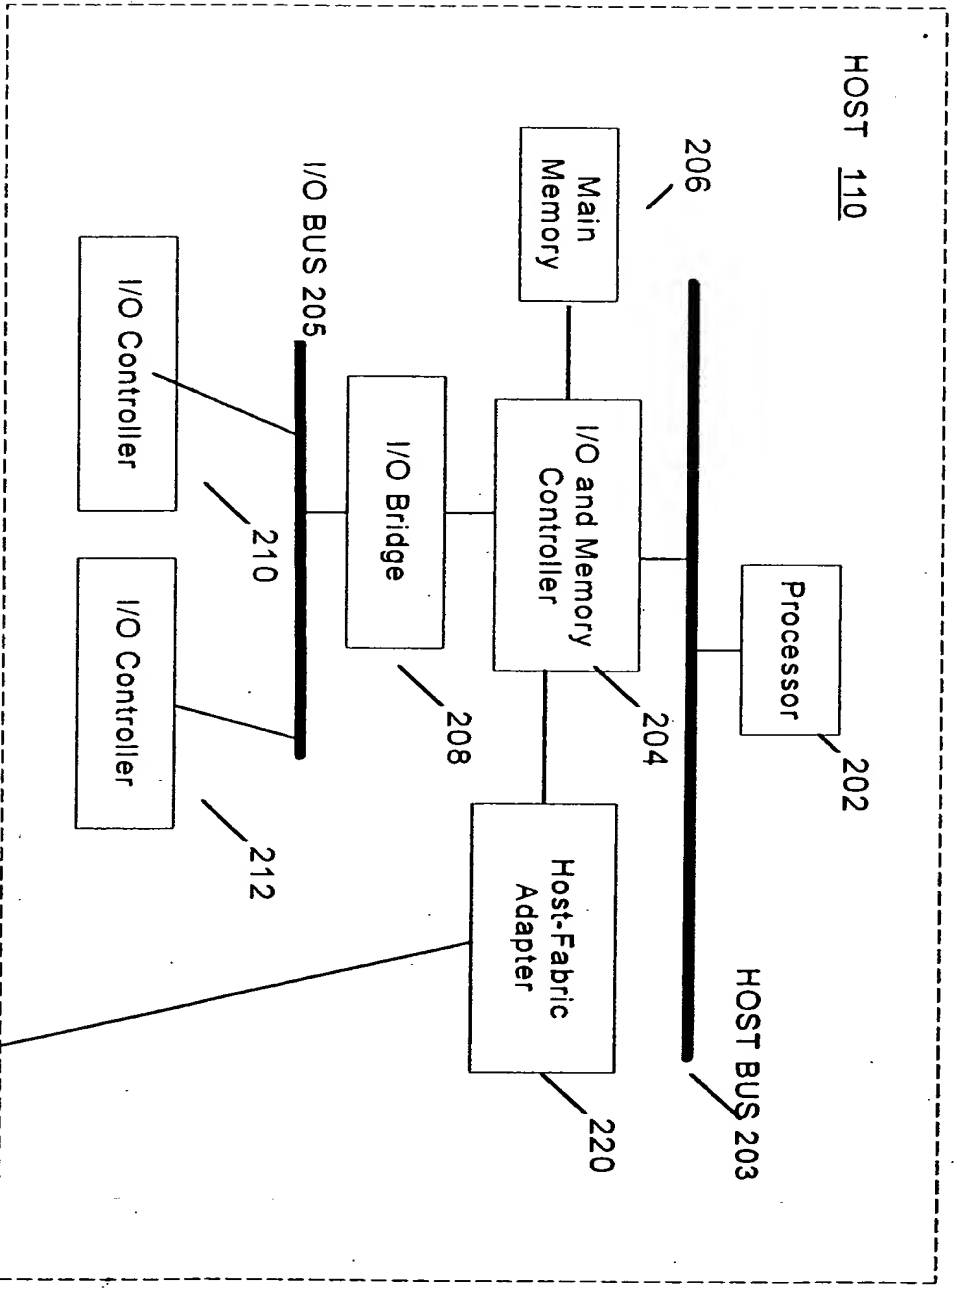


FIG. 3

00465430 424799

602121 0319160

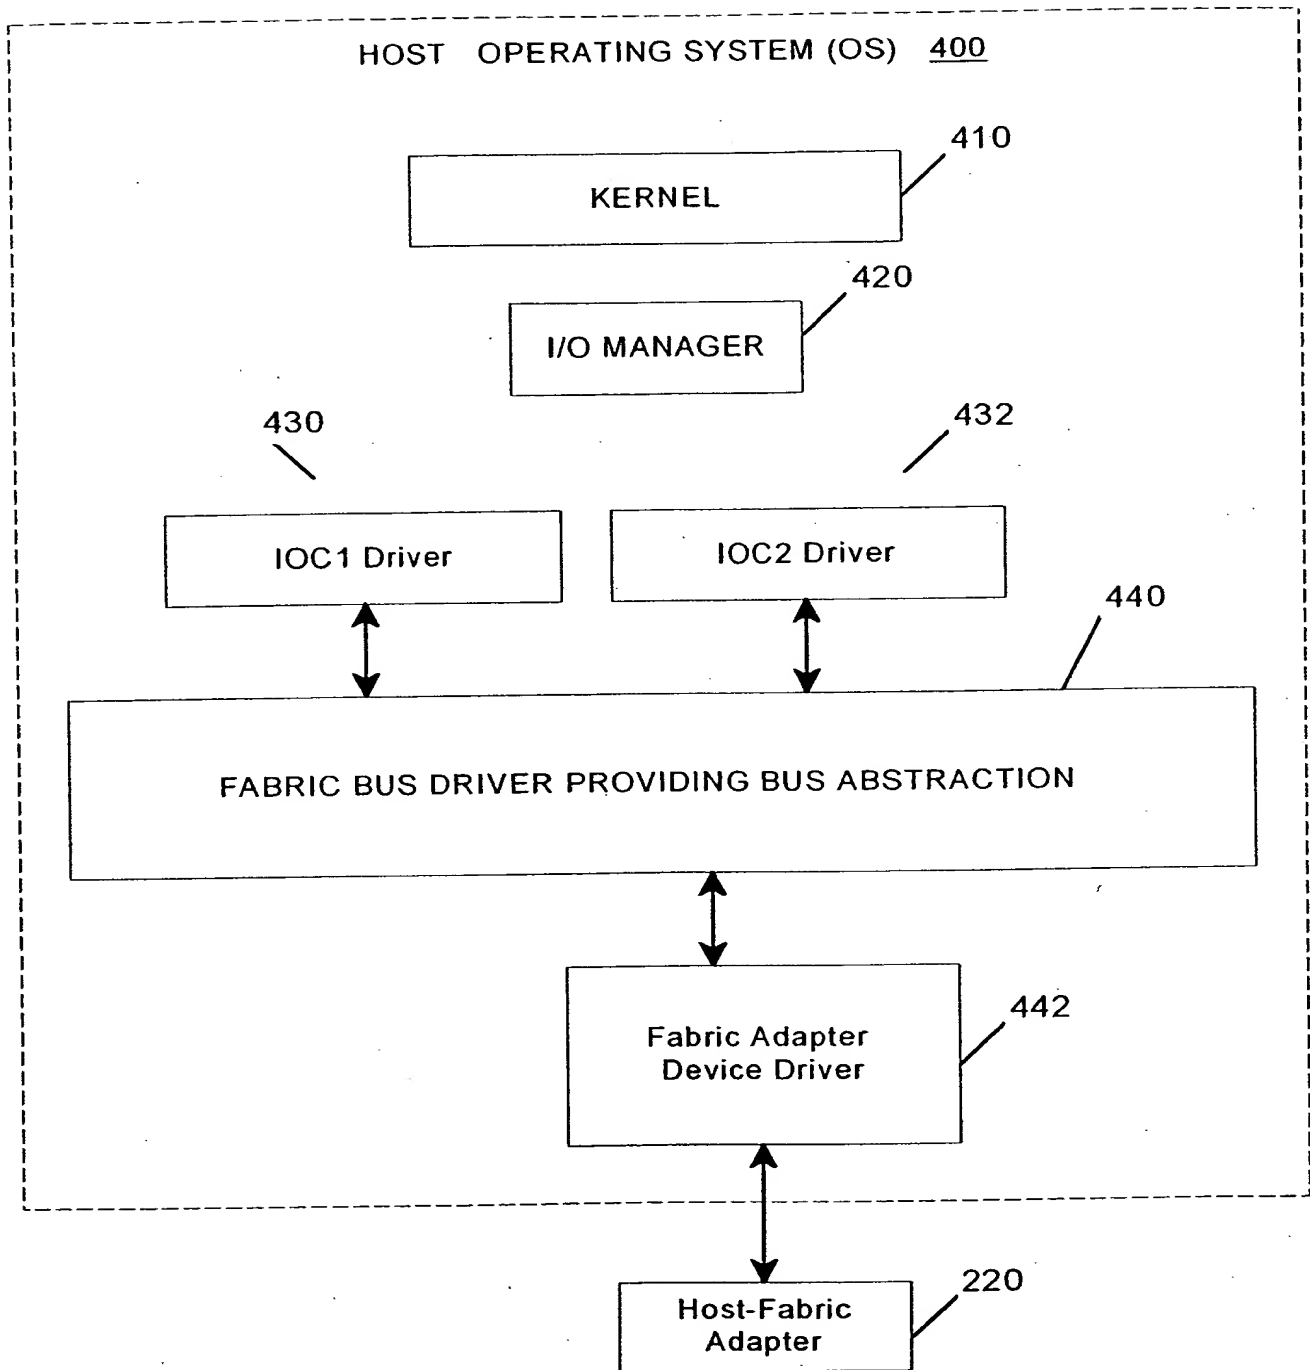

EXAMPLE SOFTWARE DRIVER STACKS FOR HOST HAVING
FABRIC-ATTACHED I/O

FIG. 4

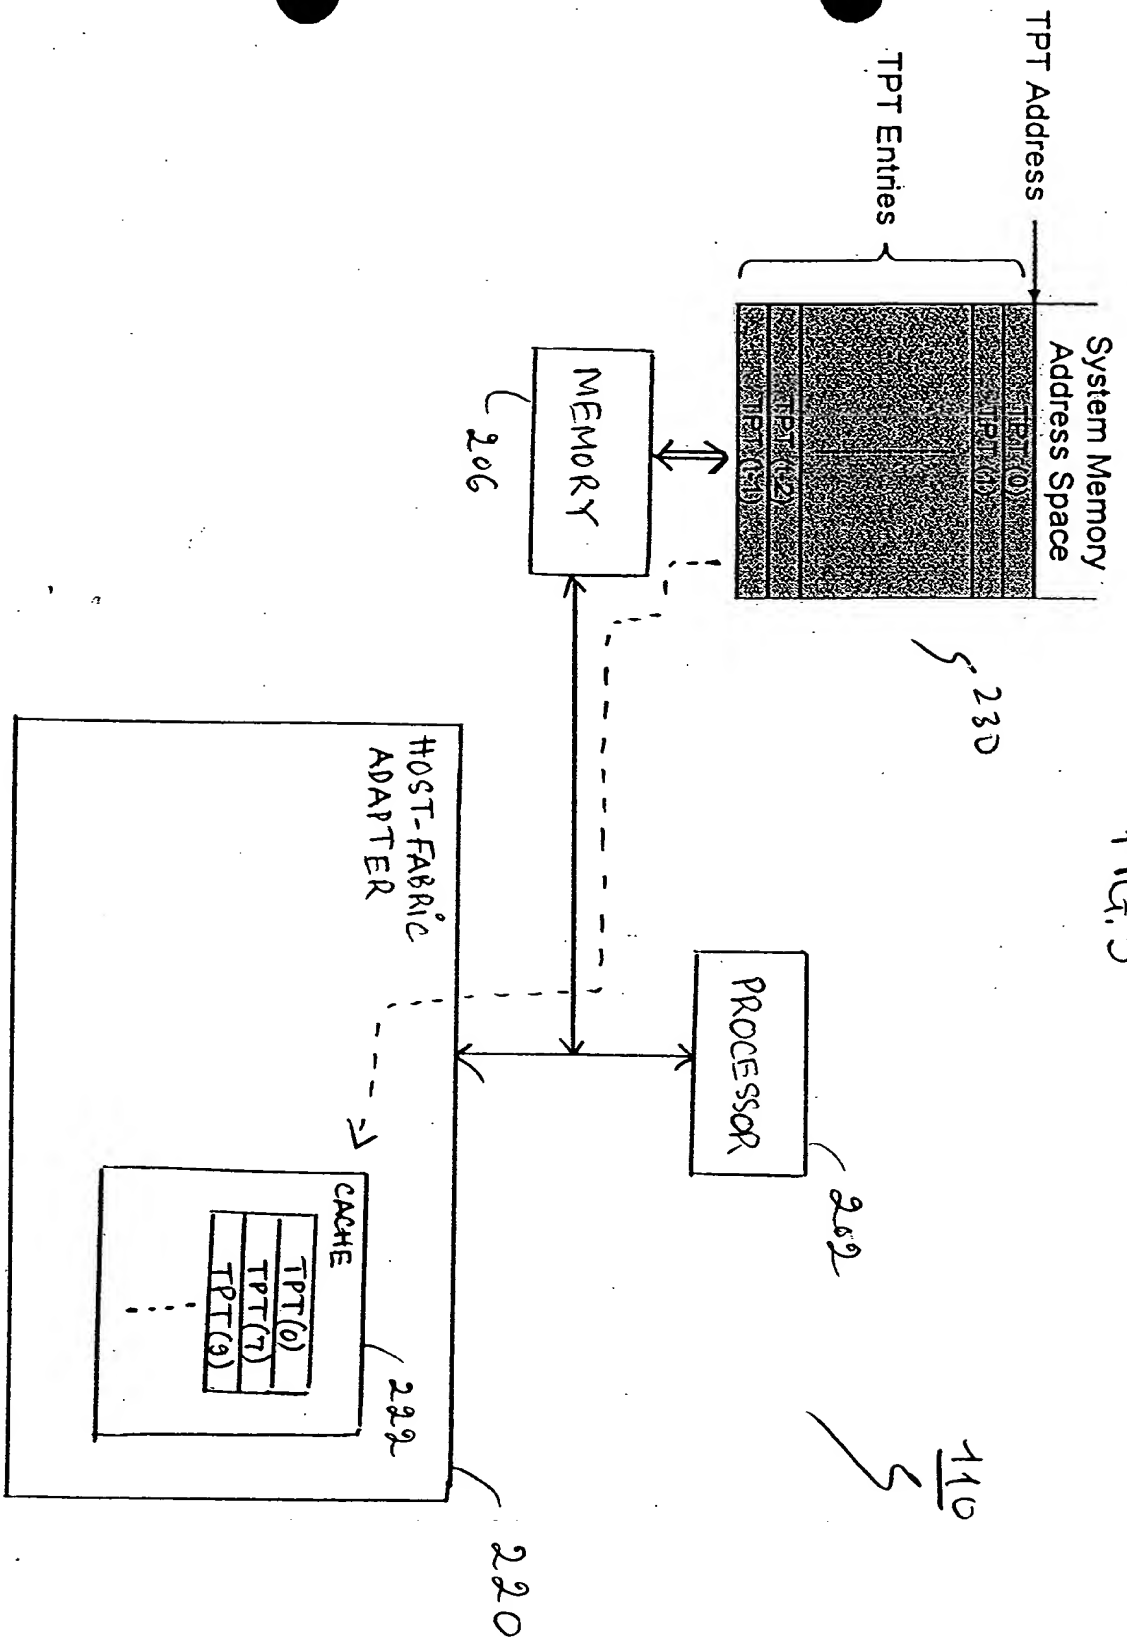


FIG. 5

00465180 121709

FIG. 6

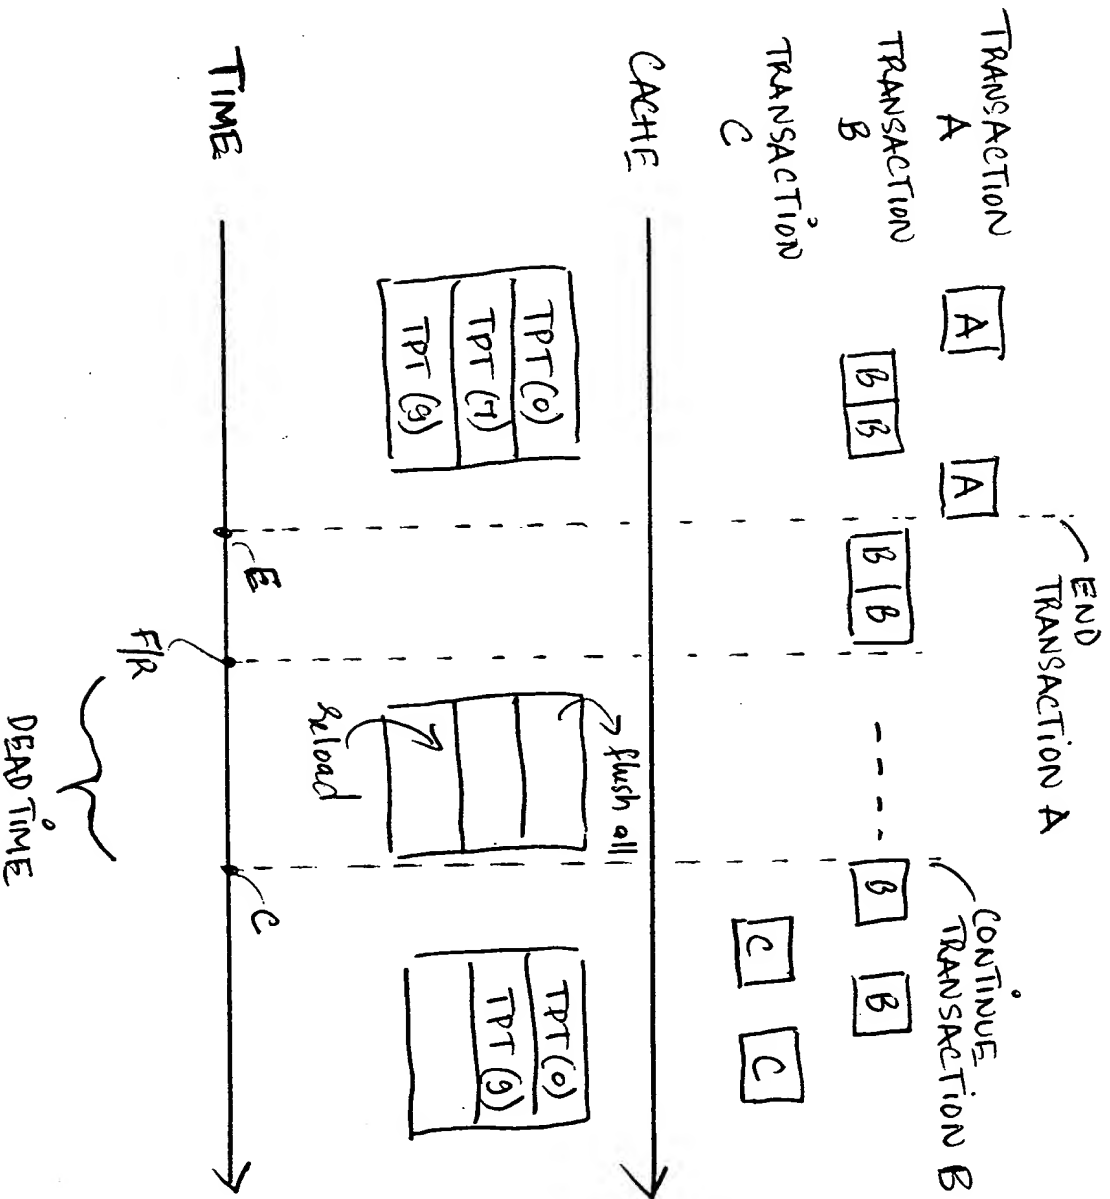


FIG. 7

700
/


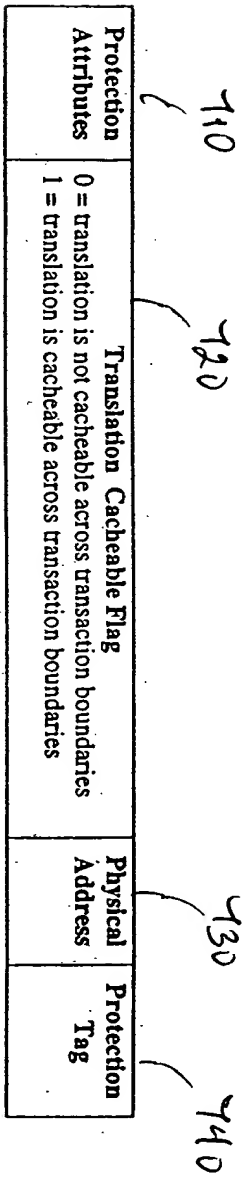


FIG. 8

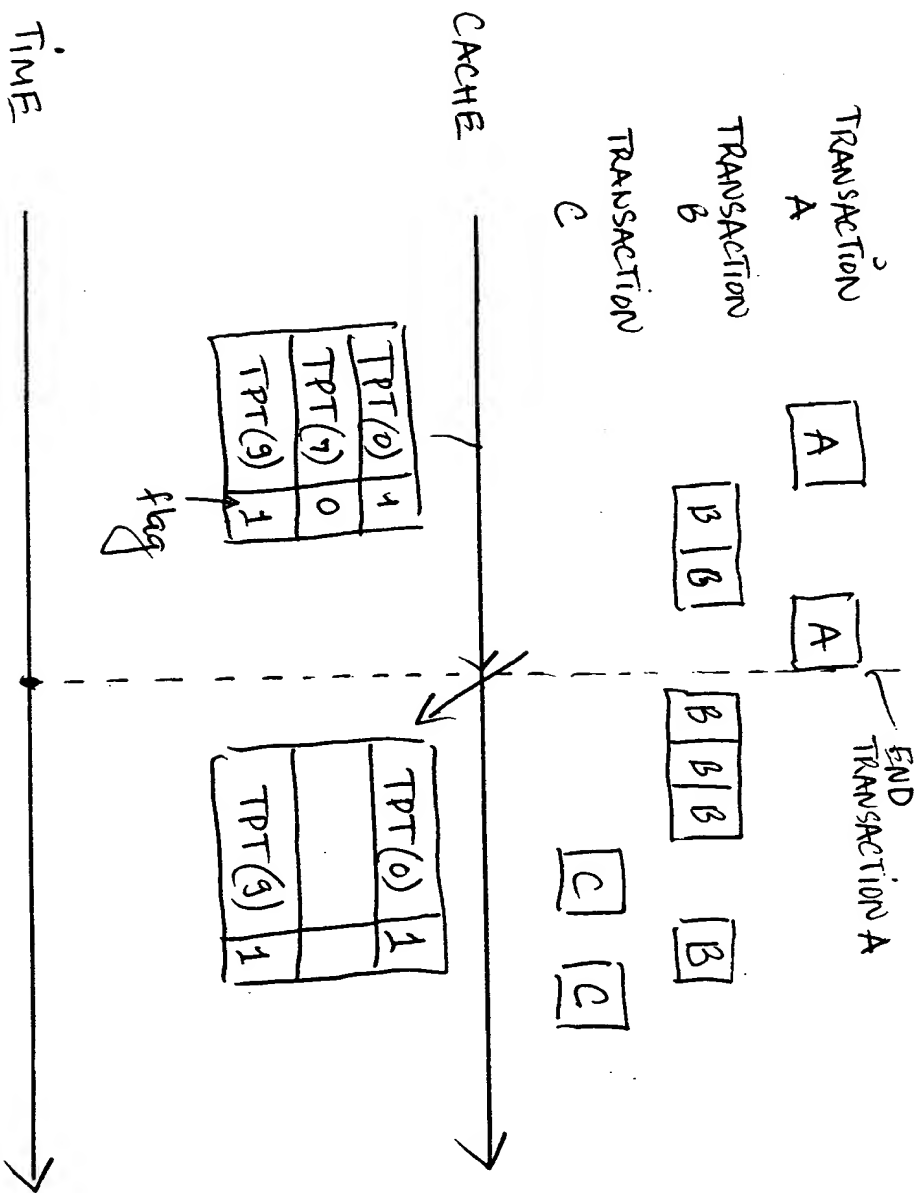

900
S

CONTROL SEGMENT <u>902</u>		
LENGTH <u>906</u>	MEMORY HANDLE <u>908</u>	VIRTUAL ADDRESS <u>910</u>

| 904

FIG. 9A

912
S

CONTROL SEGMENT <u>914</u>		
	REMOTE MEMORY HANDLE <u>920</u>	REMOTE VIRTUAL ADDRESS <u>922</u>
LENGTH <u>924</u>	LOCAL MEMORY HANDLE <u>926</u>	LOCAL VIRTUAL ADDRESS <u>928</u>

| 916
| 918

FIG. 9B

2025 RELEASE UNDER E.O. 14176

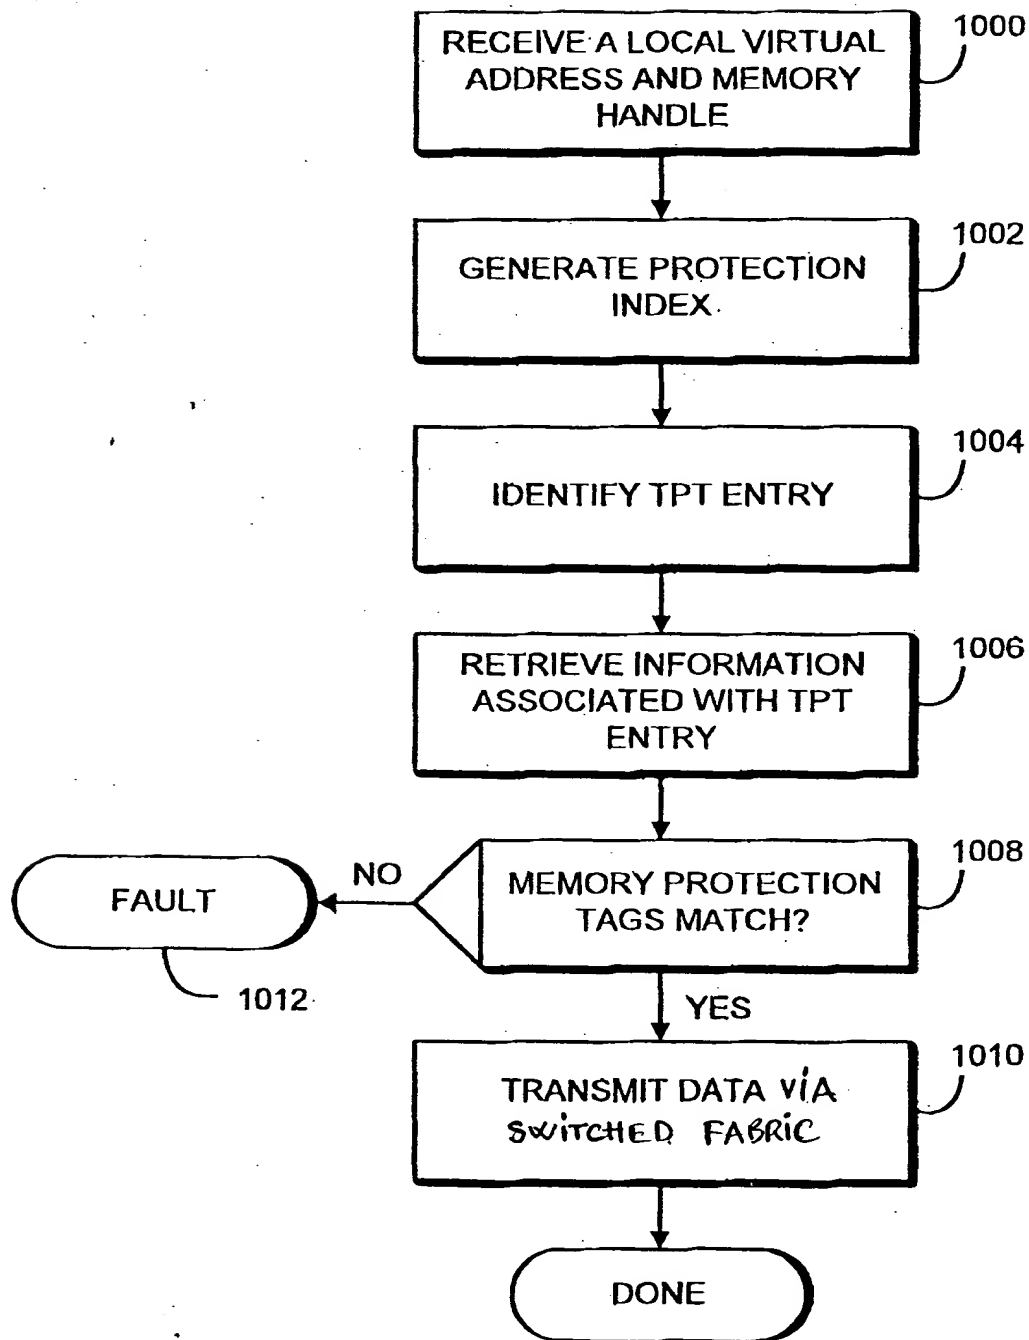


FIG. 10

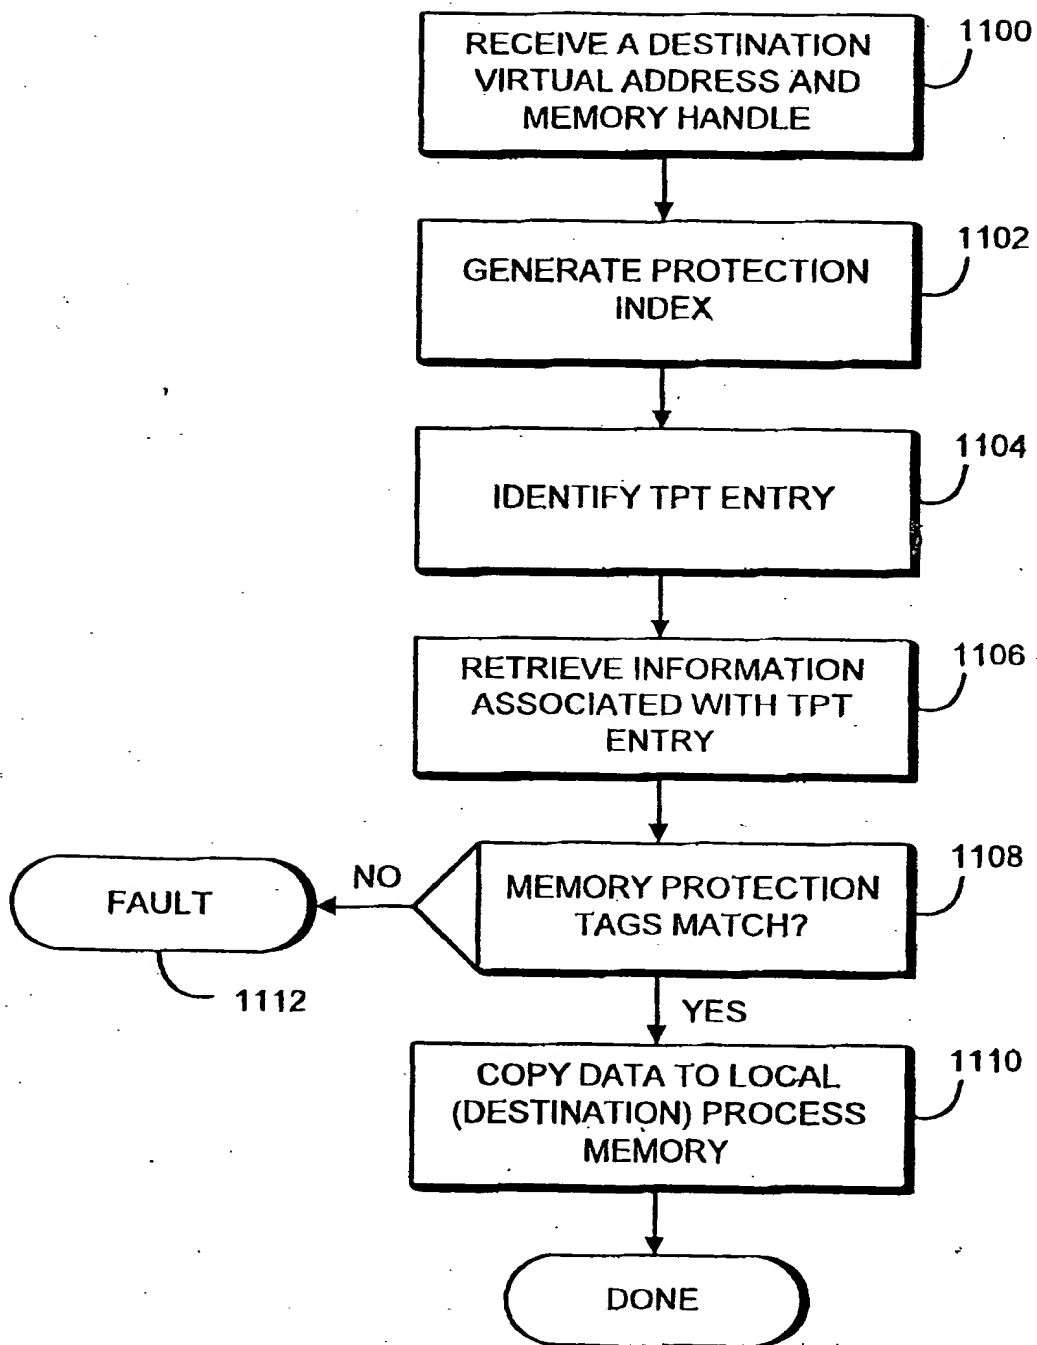


FIG. 11